




REFINOR

PRODUCT
CATALOG
Automotive refinish




Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin :  Thailand

 Customer Care: +91 9082574187  Email : vibrantfinishing@gmail.com



Series 1 Putty / Body filler

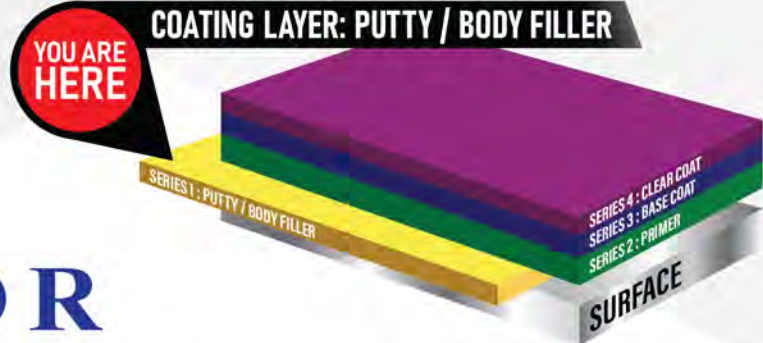

REFINOR



2K FINE PUTTY

PRODUCT DESCRIPTION

Polyester 2K Putty is two component unsaturated polyester putty. It's used to fill dents, dings, gouges and other cosmetic imperfections on bare steel, fiber glass reinforced polyester or primed surface. 184-Line is made from high quality unsaturated polyester resin and high quality of fillers that is easy to spreading and mixing, easy to sanding, good adhesion and durable painting surface.

PACKING SIZE

1 KG

SHADES



CODE	NAME	MIX RATIO	GEL TIME (mins)	SANDING TIME (mins)
184-6300	2K FINE PUTTY	100 : 3	2-3	45-60



BODY FILLER LIGHT WEIGHT

PRODUCT DESCRIPTION

Plastic Body filler that,2 components Unsaturated polyester. It's providing excellent adhesion to all metals In addition, it can be apply direct to metal or on primer. It's can used as heavy build filler without affecting the gloss of top/base coat.

PACKING SIZE

1 KG

SHADES



CODE	NAME	MIX RATIO	GEL TIME (mins)	SANDING TIME (mins)
83-4007	BODY FILLER LIGHT WEIGHT	100 : 3	3-6	60-90

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 2 Primer



241-LINE

241-LINE

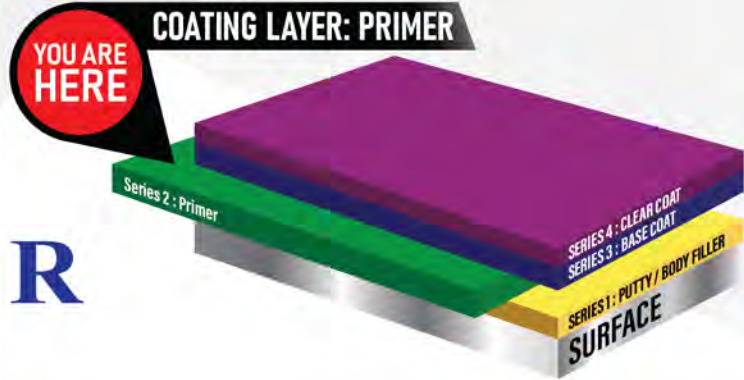

2K PRIMER 4:1

PRODUCT DESCRIPTION

2K Polyurethane Primer, A Two-component Polyurethane Primer that contains polyurethane resin as the first part and isocyanate as the second part. It provides excellent adhesion to all metals and protects against harsh conditions that can cause rust on steel surfaces. In addition, it can be used as heavy build filler without affecting the gloss of top/base coat.



MIX RATIO TOUCH DRY(mins) **SANDING TIME(mins)** **THICKNESS(micron)**

4 : 1 : 2 3-5 45-60 70-80

PACKING SIZE
1 LITER

AVAILABLE IN FOLLOWING SHADES

USE ON THE SUBSTRATE						
ALUMINUM	FIBER GLASS	PLASTIC	STAINLESS	STEEL	WOOD	ZINC
★★★	★★★★★	★★★★★	★★	★★★★★	★★★★★	★★★★



SCAN QR CODE

TDS
TECHNICAL DATA SHEET



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 2 Primer



84-1006

REFINOR

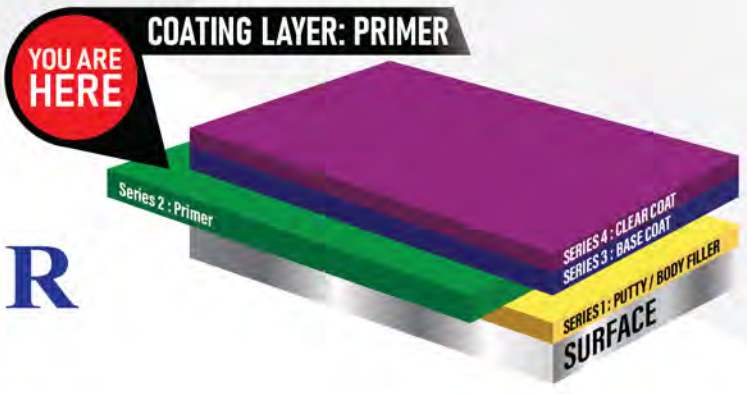

1K PRIMER GREY

PRODUCT DESCRIPTION

Nitrocellulose primer. It's contain Nitrocellulose resin and anticorrosion chemicals. It's provides excellent adhesion to all metals and protects against harsh conditions that can cause rust on steel surface. In addition, it can be used as heavy build filler without affecting the gloss of base coat or clear coat.

MIX RATIO	DRYING TIME 25-30 °C (mins)	THICKNESS(micron)
100 : 100	30-40	40-50

PACKING SIZE
1 LITER

AVAILABLE IN FOLLOWING SHADES

USE ON THE SUBSTRATE						
ALUMINUM	FIBER GLASS	PLASTIC/ABS	STAINLESS	GALVANIZED	WOOD	BRASS
★★	★★★★★	★★★★★	★	★★★★★	★★★★★	★★★★★



SCAN QR CODE
TDS
TECHNICAL DATA SHEET

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India
 Country of Origin : Thailand
 Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 2 Primer



82-8006

YOU ARE
HERE

COATING LAYER: PRIMER



REFINOR



PLASTIC PRIMER

PRODUCT DESCRIPTION

PP Primer is a single-component adhesion promoter specifically designed for polypropylene (PP) automotive plastic substrates. It improves paint adhesion on low surface energy plastics and serves as a tie-coat between PP surfaces and subsequent coating systems. The product dries quickly, forms a thin non-build film, and can be directly overcoated with automotive primer, basecoat, or topcoat systems without sanding.

APPLICATION

1. Mix the product with the paint and stir until homogeneous, then proceed to mix according to the standard application method of the main product.
2. Users should always conduct a trial to determine the appropriate usage amount before actual application.

PACKING SIZE

1 LITER

AVAILABLE IN FOLLOWING SHADES

USE ON THE SUBSTRATE				
ABS	PC/ABS	PP	HDPE	NYLON
★★★★★	★★★★★	★★	★★	★★★



SCAN QR CODE
TDS
TECHNICAL DATA SHEET



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 3
Base Coat



56-5318

YOU ARE HERE
COATING LAYER: BASE COAT

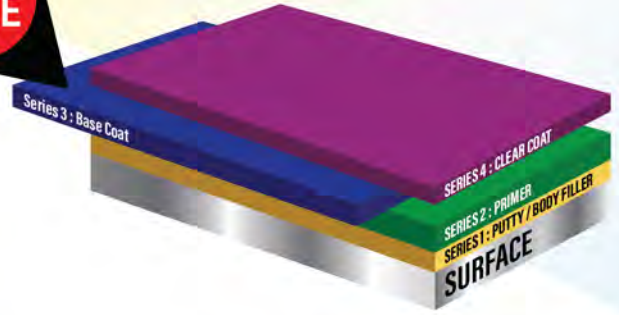

REFINOR



BASE COAT

PRODUCT DESCRIPTION

High performance Acrylic basecoat for Automotive coating. It's provide good color strength, easy to spray, good adhesion over primed coated substrate. It's also able to apply direct to plastic such as ABS, PC/ABS. It's must be used in conjunction with 2K clear coat in order to provide protection from environment.

MIXING		APPLY VISCOSITY
MIX RATIO	VOLUME	11-13 SECONDS BY NK#2
BASE COAT	1.0	
ACRYLIC THINNER	1.0	

PACKING SIZE
4 LITERS

TOUCH DRY(mins)	DRY FOR TOPCOAT(mins)	THICKNESS(micron)
3-7	10-15	20-30



56-5318 BASE COAT



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India
 Country of Origin : Thailand
 Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 4 Clear Top Coat



421-8300

REFINOR

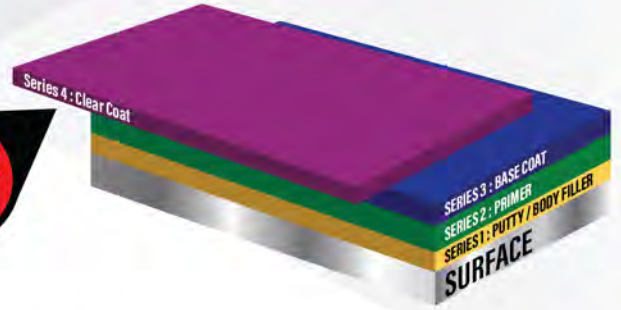

TYPE : MEDIUM SOLID

COATING LAYER: CLEAR COAT



2K PREMIUM CLEAR 2:1

PRODUCT DESCRIPTION

2K 2:1 Polyurethane clearcoat providing High gloss, Good hardness. Excellent in weathering resistance. It's provided long pot life but short time for film setting and completely dry of film. It's suitable for Car coating.

PACKING SIZE

1 LITER

SCAN QR CODE
TDS
TECHNICAL DATA SHEET



CODE	MIX RATIO	TOUCH DRY (mins)	SETTING TIME (Hrs)	MOTORCYCLE	CAR	TRUCK	BUS
421-8300	2 : 1 : 10%	4-6	2-3	★★★★★	★★★★★	★★★	★



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand


Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 4 Clear Top Coat



421-8341

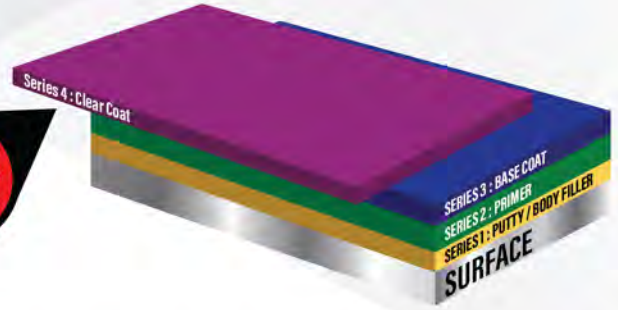

TYPE : HIGH SOLID **COATING LAYER: CLEAR COAT**



2K HIGH SOLID CLEAR 2:1

PRODUCT DESCRIPTION

2K 2:1 Polyurethane clearcoat providing High gloss, Good hardness. Excellent in weathering resistance. It's provided long pot life but short time for film setting and completely dry of film. It's suitable for Car coating.

PACKING SIZE
1 LITER



CODE	MIX RATIO	TOUCH DRY (mins)	SETTING TIME (Hrs)					
421-8341	2 : 1 : 10%	7-8	5-6	★★★★★	★★★★★	★★★★★	★★	★★



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India
Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 4 Clear Top Coat



421-8491

REFINOR

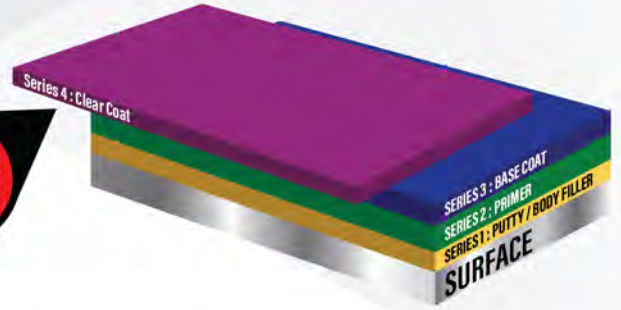

PREMIUM

TYPE : HIGH SOLID

COATING LAYER: CLEAR COAT



2K CERAMIC CLEAR 2:1

PRODUCT DESCRIPTION

2K 2:1 Polyurethane clearcoat providing High gloss, Good hardness. Excellent in weathering resistance. It's provided long pot life but short time for film setting and completely dry of film. It's suitable for Car coating.

PACKING SIZE
1 LITER | 4 LITERS



CODE	MIX RATIO	TOUCH DRY (mins)	SETTING TIME (hrs)					
421-8491	2 : 1 : 20-25%	8-10	6-7	★★★	★★★	★★★★★	★★★★★	★★★★★



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 4 Clear Top Coat



441-LINE

REFINOR

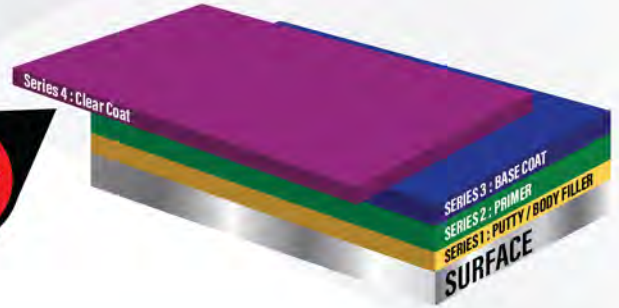

441-8100 / 2K SUPER CLEAR 4:1

PRODUCT DESCRIPTION

2K 4:1 polyurethane Clear topcoat. It's providing good adhesion, high gloss and good hardness. Excellent in weathering and chemicals resistance.

PACKING SIZE

4 LITERS

SCAN QR CODE

TDS
TECHNICAL DATA SHEET



CODE	MIX RATIO	TOUCH DRY (Hrs)	SETTING TIME (Hrs)	Truck	Van	Car	Motorcycle	Boat
441-8100	4 : 1 : 20%	4-6	4-5	★★★★★	★★★★	★★★★	★★★★	★★★★



441-8200 / 2K MATT CLEAR 4:1

PRODUCT DESCRIPTION

2K 4:1 polyurethane Clear topcoat. It's providing good adhesion, high gloss and good hardness. Excellent in weathering and chemicals resistance.

PACKING SIZE

1 LITER | 4 LITERS

SCAN QR CODE

TDS
TECHNICAL DATA SHEET



CODE	MATT	MIX RATIO	TOUCH DRY (Hrs)	SETTING TIME (Hrs)	Truck	Van	Car	Motorcycle	Boat
441-8200	100-0	4 : 1 : 10%	4-6	2-3	★★★★★	★★★★★	★★★★★	★★	★★

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 4 Clear Top Coat



441-81001

REFINOR

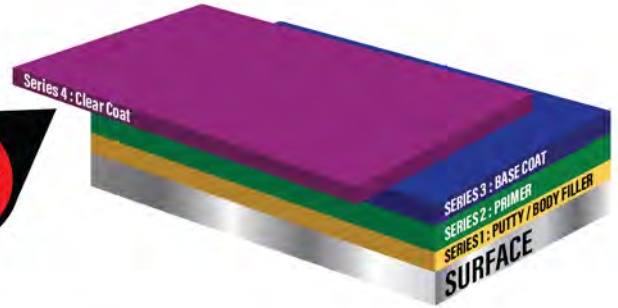

TYPE : ECONOMY

COATING LAYER: CLEAR COAT

STAR CLEAR 4:1

PRODUCT DESCRIPTION

2K 4:1 polyurethane Clear topcoat. It's providing good adhesion, high gloss and good hardness. Excellent in weathering and chemicals resistance.



PACKING SIZE

0.8 LITER

SCAN QR CODE
TDS
TECHNICAL DATA SHEET



CODE	MIX RATIO	TOUCH DRY (mins)	SETTING TIME (Hrs)	Car	Van	Bus	Truck
441-81001	4 : 1 : 15-20%	5-6	4	★★★★★	★★★★	★★★★★	★★★★★



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com




Series 4
Clear Top Coat



441-81002

REFINOR

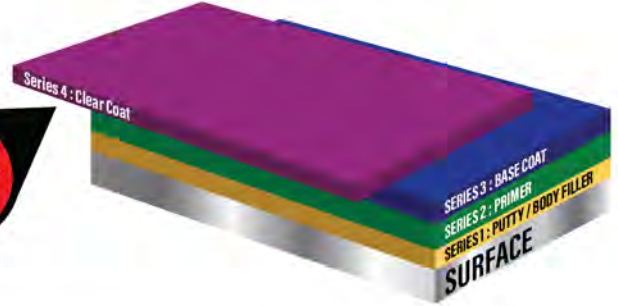

TYPE : ECONOMY

COATING LAYER: CLEAR COAT



2K SUPER BINDER 2:1

PRODUCT DESCRIPTION

The 2K 4:1 Polyurethane Clear Topcoat is a high-performance automotive refinishing product designed to provide an exceptionally high-gloss finish, excellent surface hardness, and outstanding weather resistance. The formulation allows for an extended pot life after mixing while ensuring rapid drying and curing, making it ideal for professional automotive clear finishing applications. Key Features High gloss and excellent appearance Superior surface hardness and durability Outstanding weather and UV resistance Extended pot life for ease of application Fast drying and curing for efficient processing Suitable for high-quality automotive refinishing

PACKING SIZE

0.8 LITER

SCAN QR CODE
TDS
TECHNICAL DATA SHEET



CODE	MIX RATIO	FLASH OFF TIME (mins)	SETTING TIME (Hrs)	POLISHING TIME (Hrs)
441-81002	4 : 1 : 20%	4-5	4-5	7-8

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 5
Top Coat




521-5318

521-5318

REFINOR

**YOU ARE
HERE**

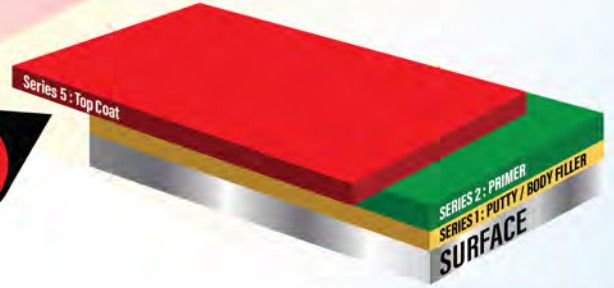

TYPE : MEDIUM SOLID

COATING LAYER: TOP COAT



2K PREMIUM TOP COAT 2:1

PRODUCT DESCRIPTION

2K 2:1 polyurethane topcoat. It's providing color shade and Gloss. It's good adhesion and good hardness. Excellent in weathering and chemicals resistance.

MIX RATIO	MIXING	
	VOLUME	BY WEIGHT
521-5318	2	2.80
21-21510	1	1.05
86-200	0.2	0.18

PACKING SIZE	
4 LITERS	18 LITERS

TOUCH DRY (mins)	SETTING TIME (hours)	POLISHING TIME (hours)
CONTACT OUR TECHNICIAN	3-4	CONTACT OUR TECHNICIAN



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India
 Country of Origin : Thailand
 Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com

521-5318 2K PREMIUM TOP COAT 2:1



Series 5
Top Coat



REFINOR

YOU ARE
HERE



PACKING SIZE
4 LITERS

521-5320 / 2K MATT TOP COAT 2:1

PRODUCT DESCRIPTION

2K 2:1 polyurethane topcoat. It's providing color shade and Gloss. It's good adhesion and good hardness. Excellent in weathering and chemicals resistance.

MIXING

MIX RATIO	VOLUME	BY WEIGHT
521-5320	2	2.74
21-2100	1	1.05
86-200	0.5	0.45

TOUCH DRY(mins)
CONTACT OUR
TECHNICIAN

SETTING TIME(hours)
3-4

POLISHING TIME(hours)
CONTACT OUR
TECHNICIAN



PACKING SIZE
4 LITERS

511-5210L / 2K TOPCOAT WHITE 2:1

PRODUCT DESCRIPTION

2K 2:1 polyurethane topcoat. It's providing color shade and Gloss. It's good adhesion and good hardness. Excellent in weathering and chemicals resistance.

MIXING

MIX RATIO	VOLUME	BY WEIGHT
521-5210	2	2.40
21-21510	1	1.05
86-200	1	0.90

TOUCH DRY(mins)
4-6

SETTING TIME(hours)
3-4

POLISHING TIME(hours)
CONTACT OUR
TECHNICIAN

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 5
Top Coat




541-LINE

541-LINE

REFINOR

TYPE : ECONOMY

COATING LAYER: TOP COAT

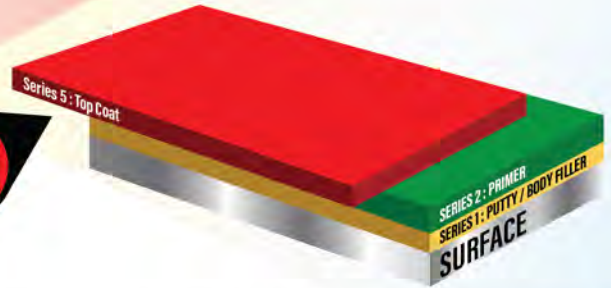

2K CV TOP COAT 4:1

PRODUCT DESCRIPTION

2K 4:1 polyurethane topcoat. It's providing color shade and Gloss. It's good adhesion and good hardness. Excellent in weathering and chemicals resistance.

CODE	MIX RATIO
541-0100	4 : 1 : 0.5
541-5100	4 : 1 : 0.5

PACKING SIZE

3 LITERS

TOUCH DRY(mins)

4-7

SANDING TIME(hrs)


4-6

THICKNESS(micron)

60-80



AVAILABLE IN FOLLOWING SHADES

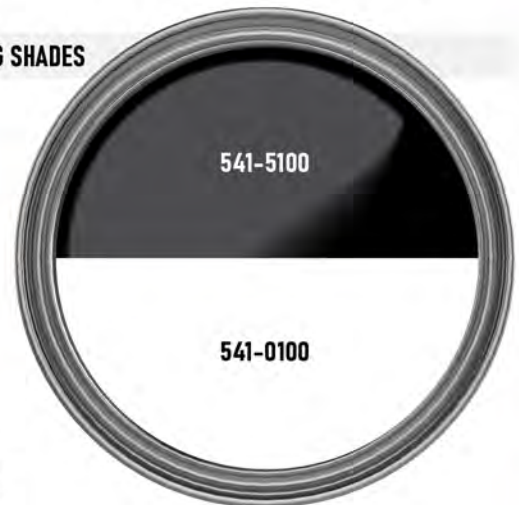

SCAN QR CODE
TDS
TECHNICAL DATA SHEET



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 6
Toner / Tinter



600-LINE

600-LINE



UNIVERSAL TINTER

PRODUCT DESCRIPTION

Universal Tinter series is a universal high concentrated color paste. It is excellent in color strength, weathering resistance, heat resistance and easy to use. It's widely compatible with various paint resin system.

MIXING			APPLY VISCOSITY
MIX RATIO	VOLUME	BY WEIGHT	FOLLOW BINDER RECOMMENDATIONS
BINDER	70-80	70-80	
UNIVERSAL TINTER	20-30	20-30	

PACKING SIZE

1 LITER | 4 LITERS

SPECIFIC GRAVITY

0.95 - 1.05 G/CM³



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 7 Additive for coating



700-7111 / ANTI SILICONE ADDITIVE

PRODUCT DESCRIPTION

Anti Silicon Additive is a product designed to solve the problem of hole paint. which is caused by water contamination or other oils, which will create a smooth, shiny paint film. In addition, add an appropriate amount of anti-hole paint. will make the color film It is smooth, easy to spray and does not affect the quality of the paint. In the long term as well. In some cases, the cleaning of the workpieces is not clean enough. Using a paint protection solution, it can also be edited. There is also the problem of oil well formation.

PACKING SIZE
1 LITER

MIXING AND RELATED PRODUCTS

MIXING RATIO FOR BASECOAT

BASECOAT : 700-7111
100 : 3-5% wt.

MIXING RATIO FOR LACQUER OR 2K SYSTEM

LACQUER/2K SYSTEM : 700-7111
100 : 5-10% wt.

After mixing the Anti Silicon Additive, you should mix the solution well with the paint before use. In the case where you want to solve the problem of a lot of holes in the paint You should experiment with increasing the mixing rate more than recommended. Do a test before every actual use.

SUPPLY VISCOSITY
10 - 12 SECOND
BY FORD CUP NO.4

SPECIFIC GRAVITY
0.90 - 1.00 G/CM³



700-7300 / FLIP-FLOP CONTROLLER

PRODUCT DESCRIPTION

Flip-Flop controller additive. It is special additive for paint.

The benefit of Flexible additive

- excellent in Flip-Flop Aluminums adjustment
- Not effect to basic performance of paint.
- Good compatibility to various of paint system.
- Easy to use

PACKING SIZE
1 LITER

MIXING AND RELATED PRODUCTS

MIXING RATIO FOR BASECOAT

ALUMINIUM PAINT BASECOAT : 700-7111
100 : 3-5 Part by volume

MAXIMUM DOSAGE

100 : 50% by Volume
The user should be test before use.

SUPPLY VISCOSITY
45 - 55 SECOND
BY FORD CUP NO.4

SPECIFIC GRAVITY
0.85 - 0.95 G/CM³

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 8 Thinner/Reducer



REFINOR



85-4 / DEGREASER SLOW

PRODUCT DESCRIPTION

85-4, Degreaser SLOW is a slow evaporation surface cleaner. It's designed for easy to clean and quick removes oil, waxes and silicones prior to applying topcoats. It's perfect for use around moldings and minor clean-up prior painting.

APPLICATION

1. SATURATE A CLEAN, DRY LINT-FREE CLOTH WITH 85-4 AND APPLY TO SMALL AREAS USING A WIPING MOTION
2. FOLLOW BY WIPING WITH A CLEAN DRY LINT-FREE CLOTH

85-4 MAY ALSO BE USED AS A QUICK CLEANER TO REMOVE FINGERPRINTS, SMUDGE MARKS, AND POT CONTAMINANTS ON SMALL AREAS WITHOUT THE USE OF SECOND DRYING CLOTH.

PACKING SIZE

1 LITER

PHYSICAL PROPERTIES

APPEARANCE	CLEAR BY VISUAL
SPECIFIC GRAVITY	0.70 -0.75 G/CM ³



86-130 / FADING THINNER

PRODUCT DESCRIPTION

86-Line, is Thinner for Automotive paint dilution. It's suitable for paint dilution. Its good excellent for reduce paint viscosity for spray. it's provide smooth dry film of paint.

APPLICATION PARAMETERS

MIXING RATIO	FOLLOW MAIN PRODUCT RECOMMENDATION
SPRAY VISCOSITY	FOLLOW MAIN PRODUCT RECOMMENDATION
SPRAY CONDITION	FOLLOW MAIN PRODUCT RECOMMENDATION
NUMBER OF COATS	FOLLOW MAIN PRODUCT RECOMMENDATION
FLASH TIME	FOLLOW MAIN PRODUCT RECOMMENDATION
DRY TIME	FOLLOW MAIN PRODUCT RECOMMENDATION

PACKING SIZE

1 LITER

PHYSICAL PROPERTIES

APPEARANCE	CLEAR BY VISUAL
SPECIFIC GRAVITY	0.90 -1.00 G/CM ³

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 8
Thinner/Reducer



86-200

REFINOR



2K THINNER FAST DRY

PRODUCT DESCRIPTION

86-Line, is Thinner for Automotive paint dilution. It's suitable for paint dilution. Its good excellent for reduce paint viscosity for spray. it's provided smooth dry film of paint.

APPLICATION PARAMETERS

MIXING RATIO	FOLLOW MAIN PRODUCT RECOMMENDATION
SPRAY VISCOSITY	FOLLOW MAIN PRODUCT RECOMMENDATION
SPRAY CONDITION	FOLLOW MAIN PRODUCT RECOMMENDATION
NUMBER OF COATS	FOLLOW MAIN PRODUCT RECOMMENDATION
FLASH TIME	FOLLOW MAIN PRODUCT RECOMMENDATION
DRY TIME	FOLLOW MAIN PRODUCT RECOMMENDATION

PACKING SIZE

5 LITERS

PHYSICAL PROPERTIES

APPEARANCE	CLEAR BY VISUAL
SPECIFIC GRAVITY	0.85 -0.95 G/CM ³



SCAN QR CODE

TDS

TECHNICAL DATA SHEET



86-200 2K THINNER FAST DRY

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 8
Thinner/Reducer



86-202

REFINOR



2K THINNER SLOW DRY

PRODUCT DESCRIPTION

86-Line, is Thinner for Automotive paint dilution. It's suitable for paint dilution. Its good excellent for reduce paint viscosity for spray. it's provide smooth dry film of paint.

APPLICATION PARAMETERS

MIXING RATIO	FOLLOW MAIN PRODUCT RECOMMENDATION
SPRAY VISCOSITY	FOLLOW MAIN PRODUCT RECOMMENDATION
SPRAY CONDITION	FOLLOW MAIN PRODUCT RECOMMENDATION
NUMBER OF COATS	FOLLOW MAIN PRODUCT RECOMMENDATION
FLASH TIME	FOLLOW MAIN PRODUCT RECOMMENDATION
DRY TIME	FOLLOW MAIN PRODUCT RECOMMENDATION

PACKING SIZE

5 LITERS

PHYSICAL PROPERTIES

APPEARANCE	CLEAR BY VISUAL
SPECIFIC GRAVITY	0.85 -0.95 G/CM ³



SCAN QR CODE

TDS

TECHNICAL DATA SHEET



86-202 2K THINNER SLOW DRY

Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India
Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Series 10
Binder



54-9100

REFINOR



METALLIC / 1K / BASE COAT BINDER

PRODUCT DESCRIPTION

High performance Binder for Automotive coating. It's provide good color strength, easy to spray, good adhesion over primed coated substrate. It's also able to apply direct to plastic such as ABS, PC/ABS. It's must be used in conjunction with 2K clear coat in order to provide protection from environment.

MIXING

MIX RATIO	VOLUME
BINDER	60-80
TONER	20-40

APPLY VISCOSITY

FOLLOW BINDER RECOMMENDATIONS

PACKING SIZE

1 LITER | 4 LITERS | 18 LITERS

PHYSICAL PROPERTIES

SPECIFIC GRAVITY	0.95 - 1.05 G/CM ³
VISCOSITY	70 - 75 KU



SCAN QR CODE

TDS

TECHNICAL DATA SHEET



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Category
Miscellaneous



001-25

001-25

REFINOR

FILTER CONE (PAPER)



PRODUCT DESCRIPTION

Paper paint filter cone designed to remove dust, dirt, and unwanted particles from paint, primer, and coatings before spraying. Helps prevent spray gun clogging and improves paint finish quality.

FEATURES

- EFFICIENTLY FILTERS CONTAMINANTS FROM PAINT AND COATINGS.
- HELPS ACHIEVE A SMOOTH AND DEFECT-FREE FINISH.
- SUITABLE FOR AUTOMOTIVE REFINISHING AND INDUSTRIAL PAINTING APPLICATIONS.
- DISPOSABLE AND EASY TO USE.

PACKING

250 PIECES PER BAG
1,000 PIECES PER BOX

MATERIAL

HIGH-QUALITY FILTER PAPER

APPLICATIONS

- AUTOMOTIVE PAINT
- PRIMER
- CLEAR COAT
- INDUSTRIAL COATINGS



SCAN QR CODE
TDS
TECHNICAL DATA SHEET



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin : Thailand

Customer Care: +91 9082574187 Email : vibrantfinishing@gmail.com



Category
Miscellaneous



99-0001

REFINOR



TACK CLOTH

PRODUCT DESCRIPTION

Tack Cloth is a specially treated cleaning cloth designed to remove dust, sanding residue, lint, and fine particles from surfaces before painting, coating, or finishing. It helps improve surface cleanliness and enhances coating quality.

FEATURES

- EFFECTIVELY REMOVES DUST AND FINE PARTICLES.
- LEAVES NO LINT OR RESIDUE ON THE SURFACE.
- READY TO USE AND EASY TO HANDLE.
- SUITABLE FOR AUTOMOTIVE, WOODWORKING, METALWORKING, AND INDUSTRIAL FINISHING APPLICATIONS.

PACKING
100 SHEETS PER BOX

MATERIAL
TREATED COTTON GAUZE

COLOR
YELLOW

SIZE
18" x 36"
(45 x 90 CM)
(OR AS SPECIFIED)

- APPLICATIONS**
- SURFACE PREPARATION BEFORE PAINTING AND COATING.
 - REMOVAL OF DUST AFTER SANDING OPERATIONS.
 - AUTOMOTIVE REFINISHING AND INDUSTRIAL FINISHING.
 - WOOD, METAL, PLASTIC, AND COMPOSITE SURFACES.


STORAGE
STORE IN A COOL, DRY PLACE AWAY FROM DIRECT SUNLIGHT.
KEEP THE PACKAGE SEALED WHEN NOT IN USE.



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India
 Country of Origin : Thailand
 Customer Care : +91 9082574187 Email : vibrantfinishing@gmail.com



Marketed By : Vibrant Finishing Solutions Unit No 15, Sidhpura Industrial Estate Mumbai - 400104, Maharashtra-India

Country of Origin :  Thailand

 Customer Care: +91 9082574187  Email : vibrantfinishing@gmail.com